



ANLY TIMER

AH5E DIGITAL TIMER



CHARACTERISTIC :

- 7-segment-display for clear display and effective monitoring
- Protection against power surge and high frequency interference
- Base-10 (99.99S~99990H) and Base-60 (99M59S or 99H59M) time ranges available
- Available on Count Up model or Count Down model

SPECIFICATION :


Operating voltage	DC(V): 12, 24 AC(V): 12, 24, 110, 220, 240
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 5A (resistive load)
Reset time	MAX 0.1S
Power consumption	Approx. 2VA
Life	Mechanical: 5,000,000 times Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C (without condensation & freezing)
Ambient humidity	MAX 85% RH (without condensation)
Altitude	MAX 2000m
Weight	AH5E Approx. 180g AH5E-C Approx. 160g

TYPE SELECTION :


Display \ Output contact	2C Delayed	2C Inst.+Delayed	G Type	None
2digits	AH5E-2D	AH5E-2DA	AH5E-2DG	
	9.9S , 99S , 9.9M , 99M , 9.9H or 99H			
3digits	AH5E-3D	AH5E-3DA	AH5E-3DG	
	9.99S , 99.9S , 999S , 99.9M , 999M , 99.9H or 999H			
4digits	AH5E-4D	AH5E-4DA	AH5E-4DG	AH5E-C
	99.99S , 999.9S , 9999S , 999.9M , 9999M , 999.9H , 9999H , 99M59S or 99H59M			999.9S , 9999S 999.9M or 9999M

CONNECTION :


2C Delayed



2C Inst.+Delayed




G Type




TIMING CHART :


2C Delayed



2C Inst.+Delayed




G Type




DIMENSIONS : (mm)

N type(Surface Mounting): Using P2CF-08 or PF085A Socket

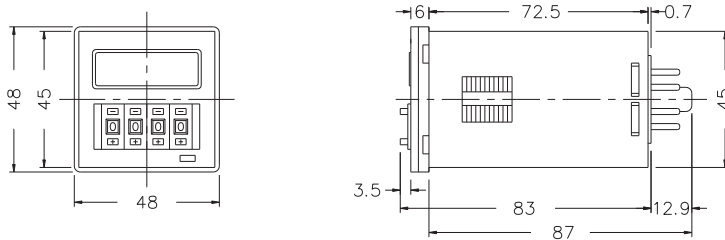

Y type(Flush Mounting): Using Y50 Frame & US-08 Socket or P3G-08 Socket

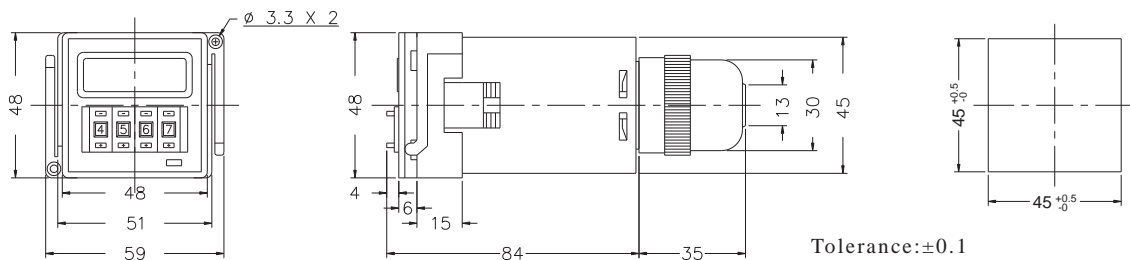

ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan
TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

HONG KONG OFFICE : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong
TEL: +852-2397-2505 FAX: +852-2397-6080

CHINA OFFICE : ANLY TECHNOLOGY (WUXI) CO., LTD.

2F, Building A, Plot 1, No. 28, Zhanhong Rd., Xinwu Dist., Wuxi, Jiangsu, P.R.China
TEL: +86-510-85304801-3

MALAYSIA OFFICE : JUSTY ELECTRONICS (M) SDN. BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia
TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

INDONESIA OFFICE : PT. ANLY ELECTRONICS INDONESIA

Jl. Pangeran Jayakarta 117/B9, Jakarta Pusat, 10730 Indonesia
TEL: +62-21-624-8436 FAX: +62-21-626-1228

NO. AH5E-W-A